

INSULFOAM

SP FIRE RATED ROOF INSULATION

Description

InsulFoam SP is an engineered insulation consisting of a superior closed-cell, lightweight and resilient expanded polystyrene (EPS) with a durable and stable, factory-laminated coated glass facer. InsulFoam SP is available in a nominal density of 1lb/ft³ or 1.25lb/ft³, and meets or exceeds the requirements of ASTM C578, Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation. In addition, InsulFoam SP offers a long-term, stable R-value and has excellent dimensional stability, compressive strength and water resistance properties.


Uses

InsulFoam SP is specifically designed for low-sloped roof applications that employ mechanically fastened or ballasted TPO, PVC and EPDM, as well as low-sloped built-up, modified bitumen and fully adhered single-ply roofs that incorporate cover boards or slip sheets. InsulRoof is also designed for use in fully-adhered fleeceback systems with compatible adhesives. Please consult local building codes and membrane manufacturers for system requirements.

Advantages

- Labor Savings.** With a factory-laminated facer, InsulFoam SP saves labor time and reduces overall project costs, when incorporated into a roofing system that would otherwise require a slip sheet.
- Code Approvals.** Insulfoam insulations are recognized in the International Code Council Evaluation Service (ICC-ES), and have numerous Underwriters Laboratory and Factory Mutual Approvals. Please contact your local Insulfoam representative for details.
- Environmentally Friendly.** It does not contain any ozone-depleting blowing agents, may contain recycled material, and is 100% recyclable if ever removed or replaced.
- Stable R-value.** The product's thermal properties will remain stable over its entire service life. There is no thermal drift, so the product is eligible for an Insulfoam 20-year thermal performance warranty.
- Proven Performance.** EPS has been manufactured using the same chemistry since the mid-1950s, providing proven performance.
- Water Resistance.** InsulFoam SP does not readily absorb moisture from the environment.

PREDICTABLY CONSISTENT VALUE.

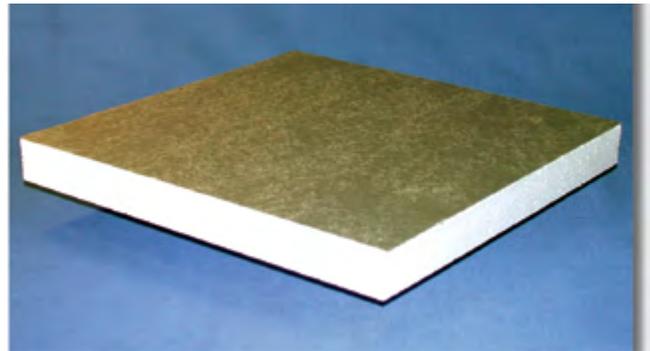

Sizes

InsulFoam SP is available in several standard thicknesses. Non-standard sizes may also be ordered; InsulRoof SP can be made up to a thickness of 6" (R-26), with a minimum thickness of 2" for 1 lb/ft³ insulation and 1.5" for 1.25 lb/ft³ insulation.

Typical Physical Properties*

Property	Test Method	Value	
Density (nom. pcf)	ASTM C303	1.00	1.25
R-Value (Resistance) - per inch (hr•ft ² •°F)/BTU	ASTM C518 or ASTM C177	@ 25 °F	4.35
		@ 40 °F	4.17
		@ 75 °F	3.85
			4.55
C-Value (Conductance) - per inch BTU/(hr•ft ² •°F)	ASTM C518 or ASTM C177	@ 25 °F	0.230
		@ 40 °F	0.240
		@ 75 °F	0.260
			0.220
Compressive Strength (psi, 10% deformation)	ASTM D1621	10-14	13-18
Flexural Strength (min. psi)	ASTM C203	25	30
Dimensional Stability (maximum %)	ASTM D2126	2.0	2.0
Water Vapor Permeance (max. perm., 1 inch)	ASTM E96	5.0	3.5
Water Absorption (max. % vol.)	ASTM C272	4.0	3.0

*Properties are based on data provided by resin manufacturers, independent test agencies and Insulfoam.

INSULATION ENGINEERED TO MAKE A DIFFERENCE.