

R-Tech®

PRODUCT SELECTOR GUIDE

R-TECH APPLICATIONS

- Below Grade Insulation
- Waterproofing Protection Board
- Cavity Walls
- Interior Walls
- Cold Storage & Freezers
- Radiant-Heated Floors
- Under Slab Insulation
- Pre-cast Concrete Panels
- Siding Backerboard
- Tilt-up Concrete Insulation
- Sheathing

CHARACTERISTICS

- Available in 4'x4' and 4'x8' panels in 3/8" to 5" thick
- Available in 200 sq ft fanfold bundles with thicknesses of 3/8", 1/2" or 3/4"
- Available with metallic reflective and white facers


CODES AND APPROVALS

- Extensive Code Approvals
- Manufactured to meet or exceed ASTM C578 *Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation*

REQUIRED COMPRESSIVE STRENGTH	INSULFOAM PRODUCT	COMPARABLE XPS
10 psi	R-Tech	None
15 psi	R-Tech X	Type X
25 psi	R-Tech IV	Type IV
40 psi	R-Tech VI	Type VI
60 psi	R-Tech VII	Type VII



R-Tech Fanfold

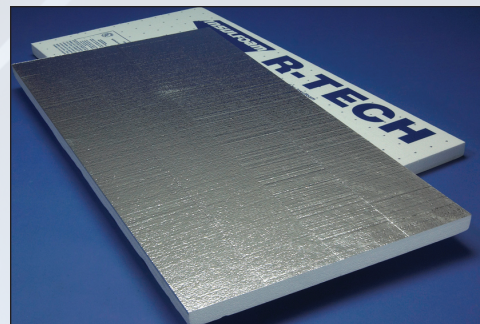

R-Tech X



Under Slab Insulation Application



Below Grade Application



Sheathing Application



Interior Wall Application

INSULFOAM
A CARLISLE Company

ENGINEERED EPS
Versatile · Durable · Recyclable

6004 N. Westgate Blvd., Suite 120 · Tacoma, WA 98406 · 800.248.5995 · Fax: 253.383.7100

WWW.INSULFOAM.COM